
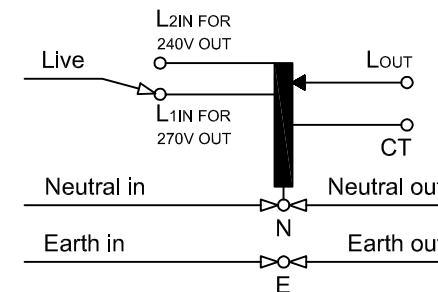
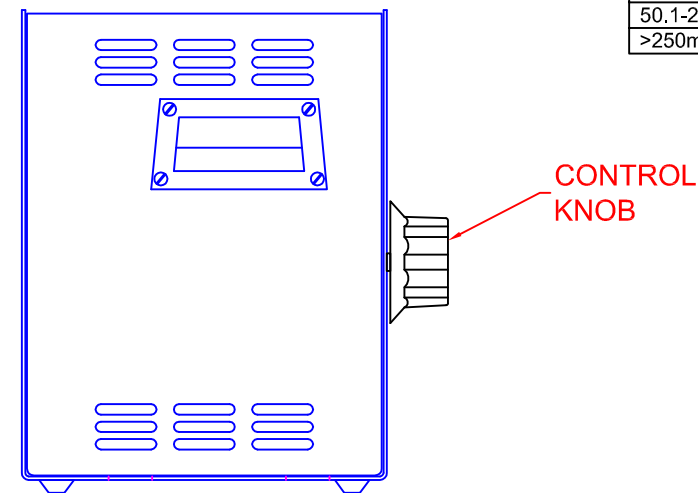


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

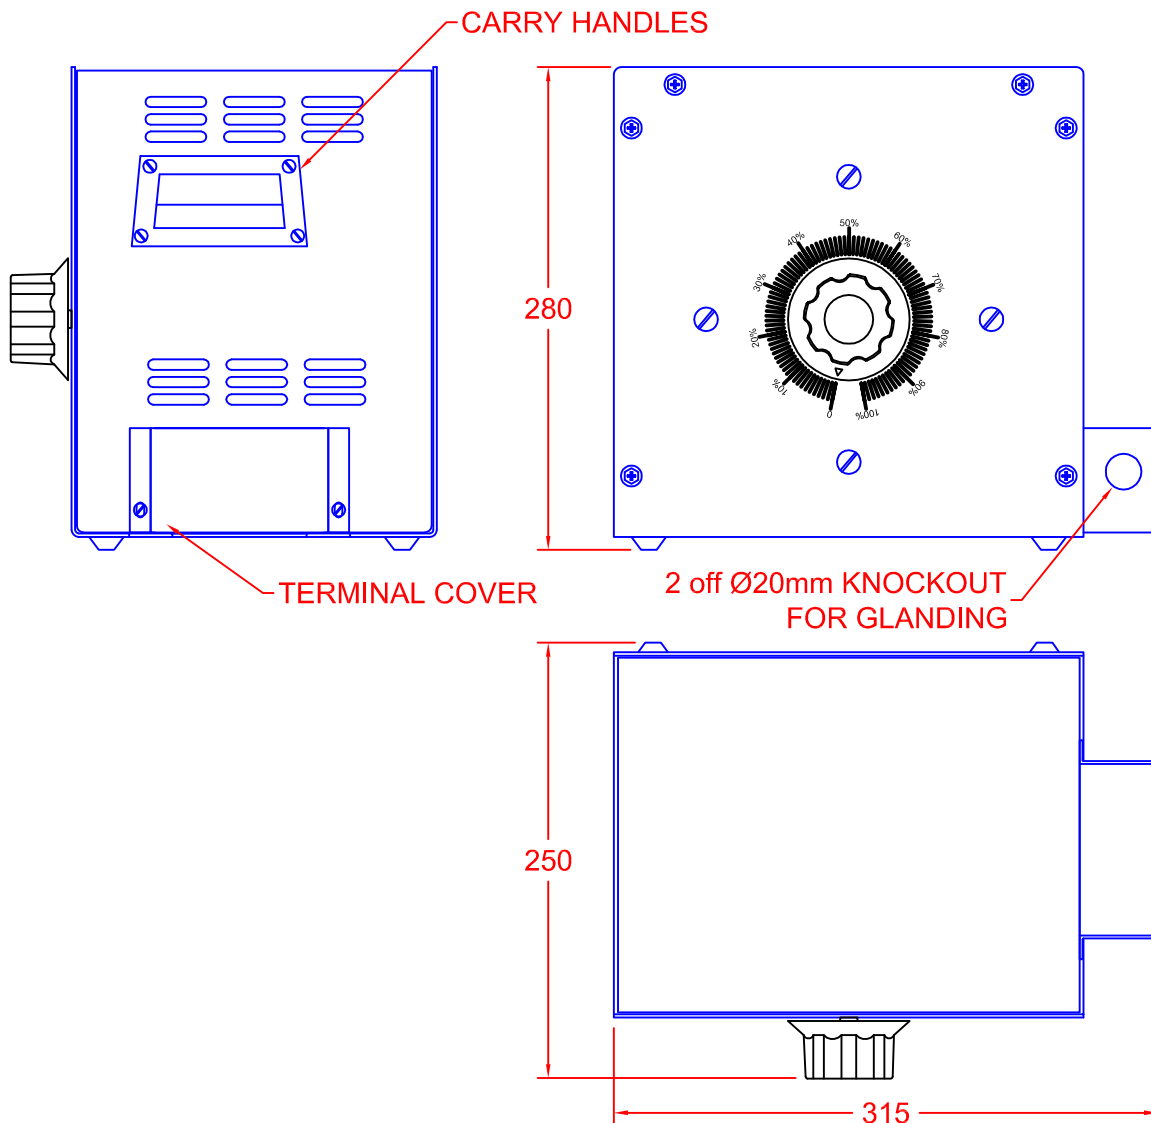

**SINGLE PHASE VARIABLE AUTOTRANSFORMER**  
**MODEL:** MVT3.3k/12A-1E  
**INPUT:** UP TO 240V, 50/60Hz  
**OUTPUT:** 0-100% OF INPUT (USE L2 240V) OR 0-112% OF INPUT (USE L1 270V)  
**RATING:** 3.3kVA AT 270V, 12A MAX  
**TERMINATION:** M6 STUDS FOR RING CRIMPS  
**ENCLOSURE:** IP20

REV	
4	
3	
2	
1	

**CARROLL & MEYNELL**  
 TRANSFORMERS LIMITED  
 TEL: 01642 617406 FAX: 01642 614178  
 enquiries@carroll-meynell.com

**TITLE**  
 VARIABLE TRANSFORMER  
 ENCLOSED, 12A  
 ALL DIMENSIONS IN mm

DRAWN	PROJECTION	DATE	SCALE
GB		19/02/15	NTS
DRAW No	REV	PAGE	
5777	0	1/1	